


EMTS-3

Mildly Corrosive Solution Applications


- 2" NPT Stainless Steel Passivated Screw Plug
- Stainless Steel Passivated Sheath Elements
- Medium Watt Density (23 W/In²)
- 3 - 9 kW
- Without Thermostat
- 240 and 480 Volt, Three Phase
- General Purpose, Moisture Resistant/Explosion Resistant Terminal Enclosure or Moisture Resistant

E1 — Dimensions (Inches)

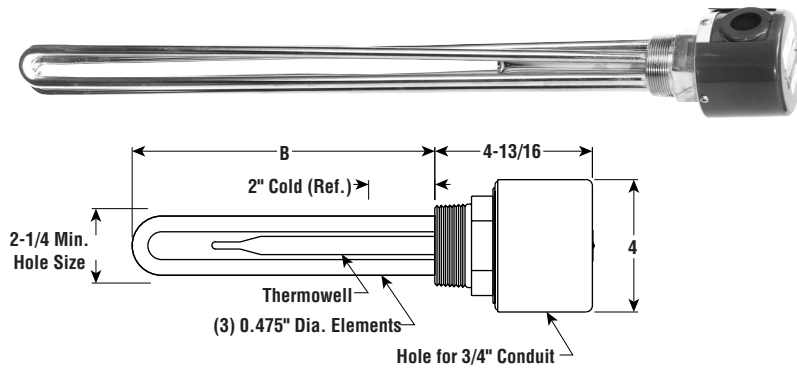


SCREW PLUG

E2 — Dimensions (Inches)

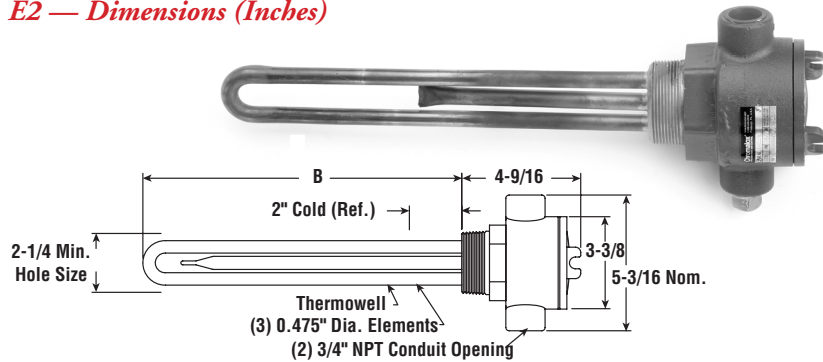

E4TP — Dimensions (Inches)

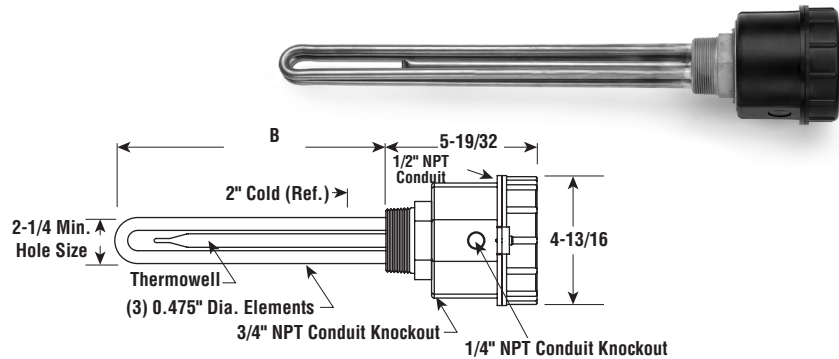

Specifications and Ordering Information

						E1 General Purpose ¹				E2 Moisture Resistant/Explosion Resistant ²				E4 Moisture Resistant			
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)
3	240	3	23	3	17-3/4	EMTS-3030	AS	091686	6	EMTS-3030E2	AS	033398	9	EMTS-3030E4TP	AS	061436	12
3	480	3	23	3	17-3/4	EMTS-3030	AS	091694	6	EMTS-3030E2	AS	033400	9	EMTS-3030E4TP	AS	061444	12
4.5	240	3	23	3	24-7/8	EMTS-3045	AS	091707	7	EMTS-3045E2	AS	033419	10	EMTS-3045E4TP	AS	061452	13
4.5	480	3	23	3	24-7/8	EMTS-3045	AS	091715	7	EMTS-3045E2	AS	033427	10	EMTS-3045E4TP	AS	061460	13
6	240	3	23	3	32-7/16	EMTS-3060	AS	091723	9	EMTS-3060E2	AS	033435	12	EMTS-3060E4TP	AS	061479	15
6	480	3	23	3	32-7/16	EMTS-3060	AS	091731	9	EMTS-3060E2	AS	033443	12	EMTS-3060E4TP	AS	061487	15
7.5	240	3	23	3	40-3/8	EMTS-3075	AS	091740	10	EMTS-3075E2	AS	033451	13	EMTS-3075E4TP	AS	061575	16
7.5	480	3	23	3	40-3/8	EMTS-3075	AS	091758	10	EMTS-3075E2	AS	033460	13	EMTS-3075E4TP	AS	061583	16
9	240	3	23	3	47-7/8	EMTS-3090	AS	091766	12	EMTS-3090E2	AS	033478	15	EMTS-3090E4TP	AS	061591	18
9	480	3	23	3	47-7/8	EMTS-3090	AS	091774	12	EMTS-3090E2	AS	033486	15	EMTS-3090E4TP	AS	061604	18

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are ^cCSA_{US}® Certified.

FASTShip

Same-day shipping on stock item orders received before 4 pm CST.
3-day shipping on assembly-stock items.