



120, 208 & 240 VOLT SINGLE PHASE TTUH-CO HEATERS 2500 AND BELOW WATTAGES

Figure 4

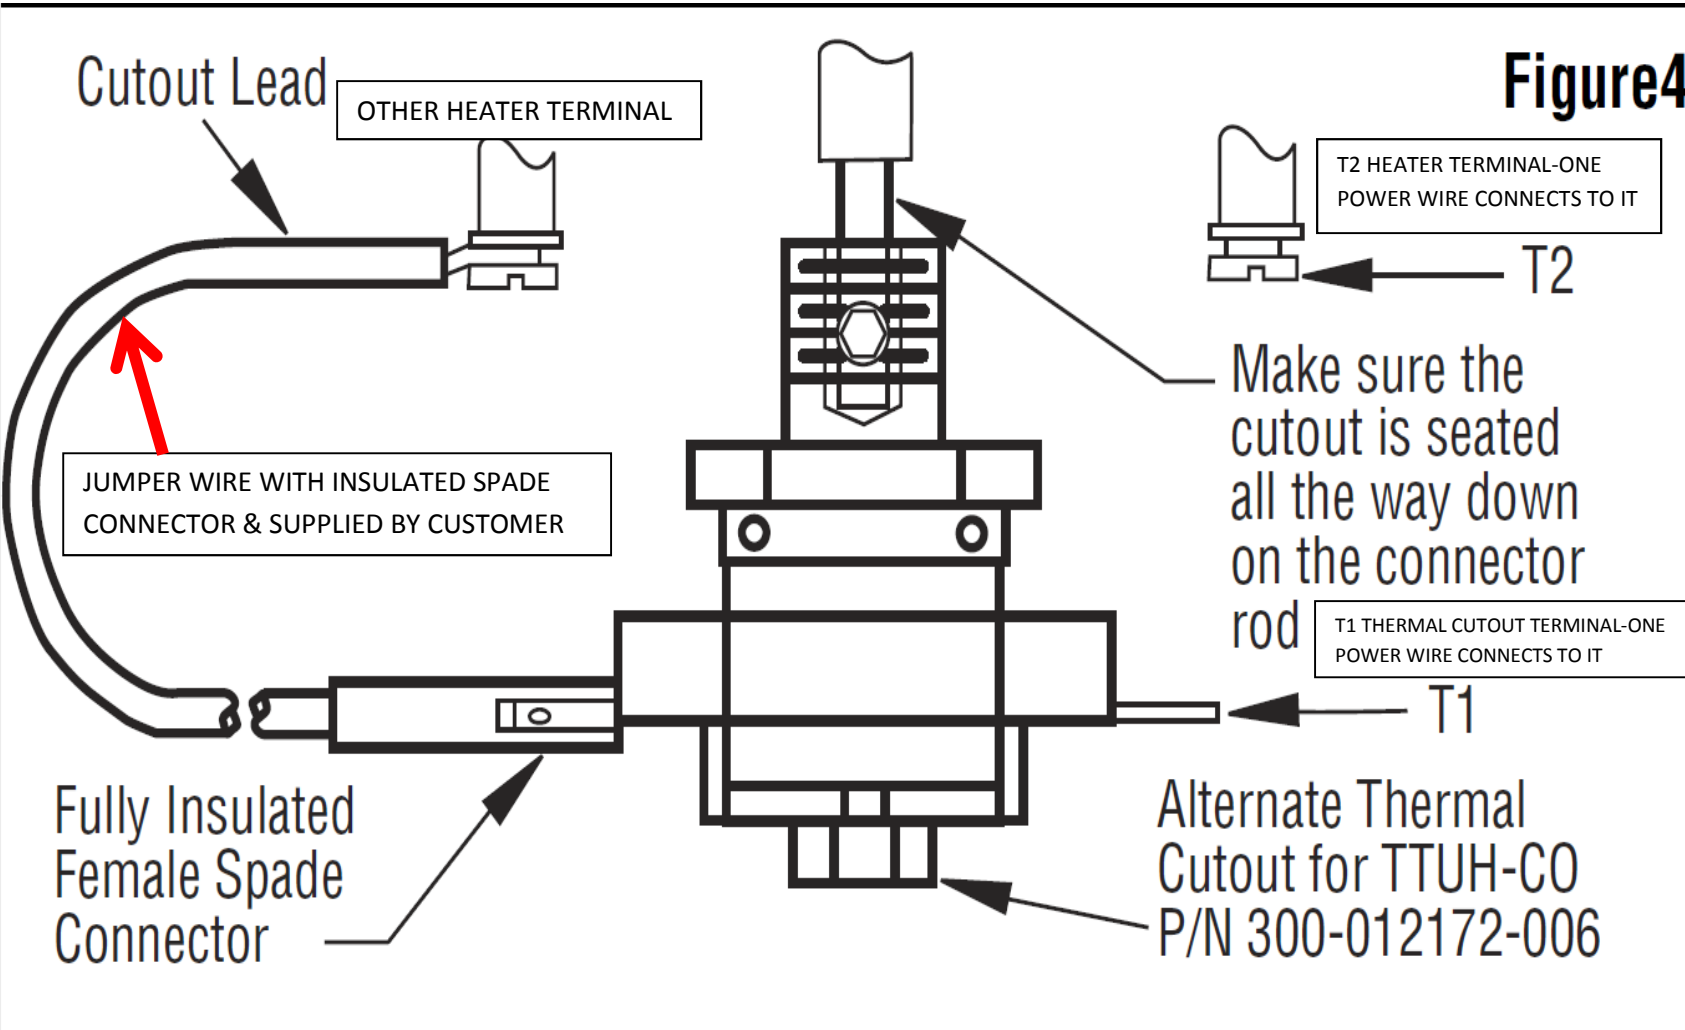

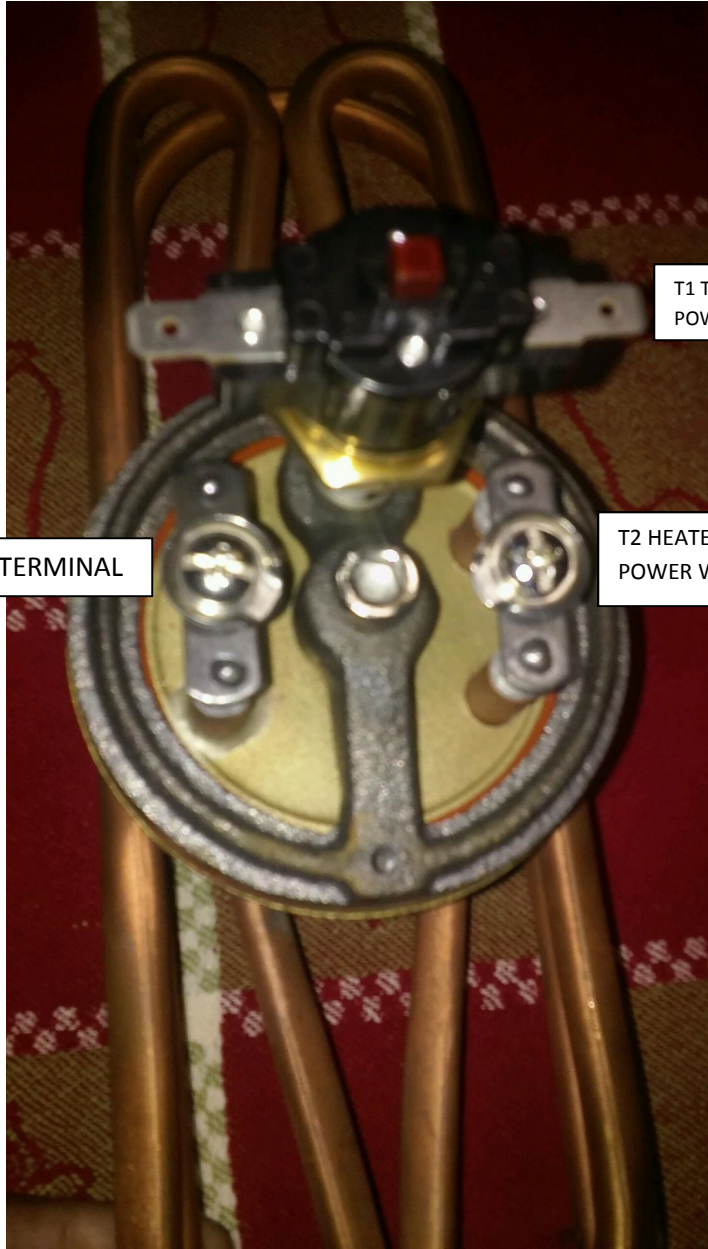


T1 THERMAL CUTOUT TERMINAL-ONE  
POWER WIRE CONNECTS TO IT

OTHER HEATER TERMINAL

T2 HEATER TERMINAL-ONE  
POWER WIRE CONNECTS TO IT

**120, 208, 240 & 480 VOLT SINGLE PHASE TTUH-CO HEATERS 3000 AND ABOVE WATTAGES**

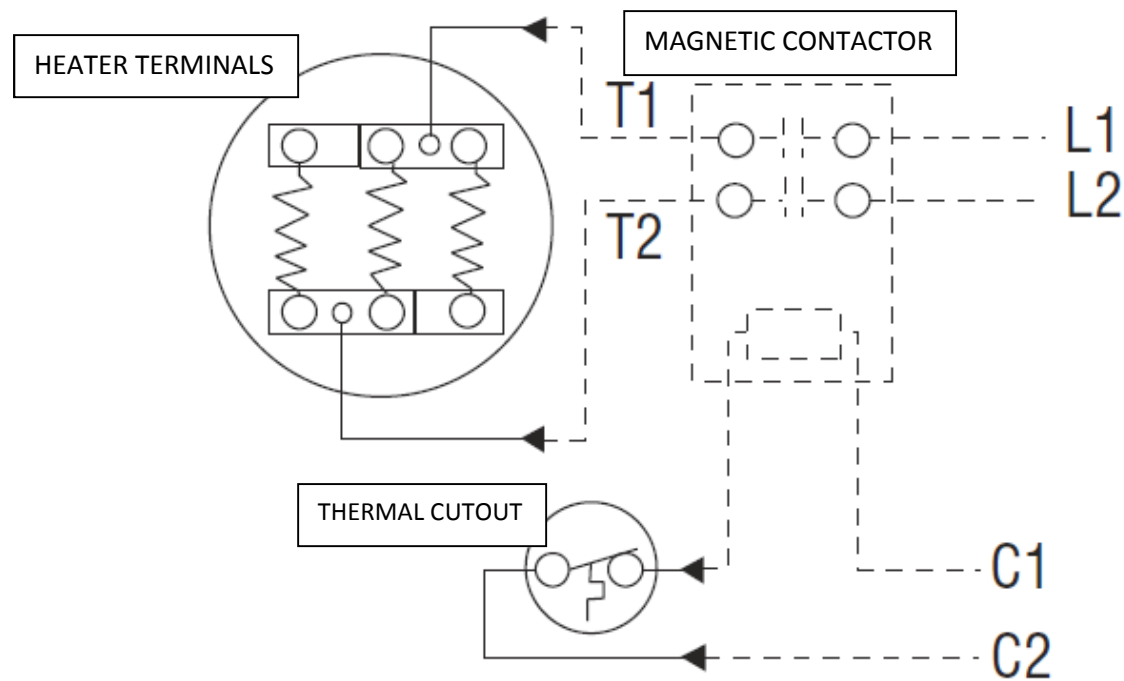

**120, 208 & 240V**

**Note:** Single phase heaters 3 kW and above require the use of a contactor.

**Figure 8 — TTUH-CO 1 Phase**